



FLOAT™ BENCH

PRODUCT DATA





FLOAT™ BENCH

PRODUCT DATA

The **Float Bench** is a simple, timeless design that adapts to many seating scenarios, from streetscapes to corporate campuses to healthcare settings and more. Benches are available backed or backless, with integral end armrests and an optional center seat divider. Vertical slats running perpendicular to the length of the seat create a crisp, clean look. Float's uncluttered style is matched by durable material options. Slats can be specified in domestically sourced FSC® Mix Credit Thermally Modified Red Oak or FSC® 100% Cumaru hardwood. Frames of corrosion-resistant powdercoated aluminum come in a full range of standard and custom colors for easy tailoring to site-specific themes.

MATERIAL & CONSTRUCTION DETAILS

FRAMES
<ul style="list-style-type: none"> Float bench frames are made of aluminum with a powdercoat finish. See the Forms+Surfaces Powdercoat Chart for details. Custom RAL colors are available for an upcharge. Due to the inherent nature of metal castings, gloss powdercoats are not offered on cast components.

OPTIONAL SEAT DIVIDER
<ul style="list-style-type: none"> Backed and backless benches are available with an optional seat divider. Seat dividers are solid aluminum with powdercoat finish and detailing to match the bench frame.


SLATS
<ul style="list-style-type: none"> Float benches are available with slats of FSC® 100% Cumaru hardwood or FSC® Mix Credit Thermally Modified Red Oak. Both FSC® 100% Cumaru hardwood and FSC® Mix Credit Thermally Modified Red Oak slats have a natural oiled finish that enhances the wood's rich color. (FSC License Code: FSC-C004453)

INSTALLATION & MAINTENANCE

INSTALLATION
<ul style="list-style-type: none"> Float Benches can be freestanding or surface mounted. Stainless steel anchors and mounting bolts are sold separately.

MAINTENANCE
<ul style="list-style-type: none"> Metal surfaces can be cleaned as needed using a soft cloth or brush with warm water and a mild detergent. Avoid abrasive cleaners. FSC® 100% Cumaru hardwood and FSC® Mix Credit Thermally Modified Red Oak can be maintained by re-oiling as needed with Penofin® hardwood finish or similar products. (FSC License Code: FSC-C004453)

NOMINAL DIMENSIONS

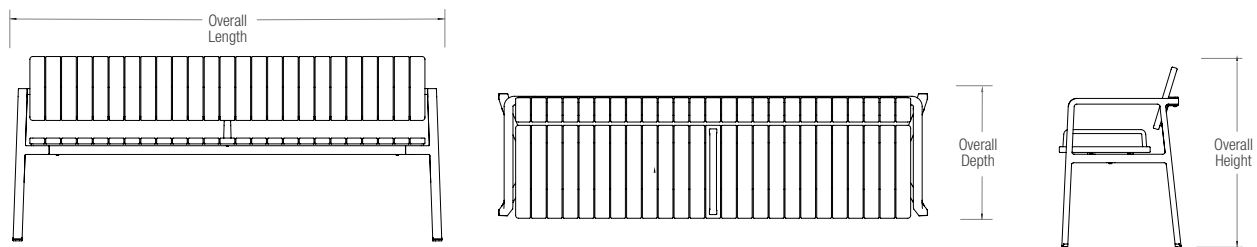

MODEL	OVERALL LENGTH	OVERALL DEPTH	SEAT DEPTH	OVERALL HEIGHT	SEAT HEIGHT	ARMREST HEIGHT	WEIGHT*
SBFLO-72BC	72.7" (1848 mm)	21.4" (544 mm)	16" (406 mm)	31.6" (805 mm)	17.6" (449 mm)	26.1" (665 mm)	138 lbs (62.6 kg)
SBFLO-72BO	72.7" (1848 mm)	21.4" (544 mm)	16" (406 mm)	31.6" (805 mm)	17.6" (449 mm)	26.1" (665 mm)	105.7 lbs (48 kg)

*Add 3.6 lbs (1.63 kg) for a seat divider.


See Page 2 for complete model number descriptions.



FLOAT™ BENCH

PRODUCT DATA

NOMINAL DIMENSIONS, CONTINUED

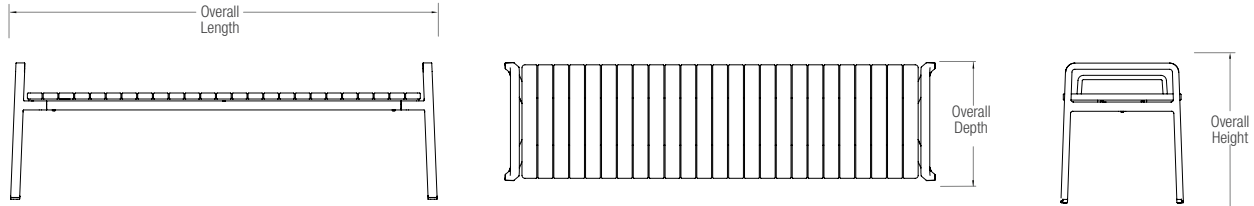

MODEL	OVERALL LENGTH	OVERALL DEPTH	SEAT DEPTH	OVERALL HEIGHT	SEAT HEIGHT	ARMREST HEIGHT	WEIGHT*
SBFLO-72NC	72.7" (1829 mm)	20.4" (581 mm)	20.4" (581 mm)	22.6" (576 mm)	17.6" (449 mm)	22.6" (449 mm)	95.7 lbs (43.4 kg)
SBFLO-72NO	72.7" (1829 mm)	20.4" (581 mm)	20.4" (581 mm)	22.6" (576 mm)	17.6" (449 mm)	22.6" (449 mm)	72.9 lbs (33.1 kg)

*Add 3.6 lbs (1.63 kg) for a seat divider.
 See complete model number descriptions below.

ENVIRONMENTAL CONSIDERATIONS

- Please refer to the Float Bench Environmental Data Sheet for detailed environmental impact information.
- Float aluminum frames have up to 65% recycled content.
- All Float metal components are fully recyclable.
- Standard powdercoat finishes are no-VOC; non-standard powdercoat finishes are no- or low-VOC, depending on color.
- Low maintenance.
- Easy to disassemble.

MODEL NUMBERS AND DESCRIPTIONS

MODEL	DESCRIPTION
SBFLO-72NC	Float Bench, FSC® 100% Cumaru hardwood slats, 6 foot, backless
SBFLO-72NO	Float Bench, FSC® Mix Credit Thermally Modified Red Oak slats, 6 foot, backless
SBFLO-72BC	Float Bench, FSC® 100% Cumaru hardwood slats, 6 foot, backed
SBFLO-72BO	Float Bench, FSC® Mix Credit Thermally Modified Red Oak slats, 6 foot, backed

PRODUCT OPTIONS

The following options are available for an upcharge

Seat dividers for backed or backless Float Bench	Custom RAL powdercoat color
Stainless steel anchors and mounting bolts	

LEAD TIME: 6 to 8 weeks for freestanding or surface mounted benches and planters; shorter lead times may be available upon request. Please contact us to discuss your specific timing requirements.

PRICING: Please contact us at **800.451.0410** or **sales@forms-surfaces.com**. At Forms+Surfaces, we design, manufacture and sell our products directly to you. Our sales team is available to assist you with questions about our products, requests for quotes, and orders. Territory Managers are located worldwide to assist with the front-end specification and quoting process, and our in-house Project Sales Coordinators follow your project through from the time you place an order to shipment.

TO ORDER SPECIFY: Quantity, model, powdercoat color for frame, number, and location of optional armrests. Quote/Order Forms are available on our website to lead you through the specification process in a simple checkbox format.