

**PROJECT NAME:** \_\_\_\_\_ **DATE:** \_\_\_\_\_

**JOB LOCATION:** \_\_\_\_\_ **SPECIFIER:** \_\_\_\_\_

PLEASE USE ADOBE READER OR ADOBE ACROBAT TO FILL OUT AND SAVE FORM. USING OTHER PROGRAMS COULD RESULT IN UNSAVED DATA.

**APPLICATIONS**

If you select a Forms+Surfaces System, please skip the Project Details, Lite Descriptions and Glass Characteristics sections.

**Forms+Surfaces Systems**

- LEVELr Wall Cladding System
- LEVELr Column System
- LEVELr Elevator Interiors
- LEVELe Wall Cladding System
- LEVELe Column System
- LEVELe Elevator Interiors
- LEVELc-2000 Elevator Interiors
- Glass Doors
- Stile & Rail Doors
- LightPlane Panels (View only)

**Other Applications\***

- Loose Lite(s)
- Other: \_\_\_\_\_

\*For Other Applications, please fill out all sections.

**PROJECT DETAILS**

Please choose **one** option from each category.

**Installation Type**

- Captured Top & Bottom Only
- Fully Framed
- Mounted to a Solid Substrate
- Curtain Wall/IGU
- Post Mounted with Holes
- Water Feature

**Glass Thickness**

- 5/16" (7.7 mm)
- 7/16" (11.1 mm)
- 9/16" (13.7 mm)

**Environment**

- Interior, Standard Humidity
- Interior, High Humidity
- Exterior, Exposed Setting
- Exterior, Covered Setting

**Lighting Conditions**

- Natural
- Backlit
- Spotlight
- Other (please provide details):  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**LITE DESCRIPTION**

Description (include part number, if available)	Quantity	Size (width x height)
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

**GLASS CHARACTERISTICS**

Please choose **one** option from each category.

**Safety Standards**

- Annealed
- Tempered\*
- Heat Strengthened\*\*

**Profile**

- Flat
- Curved (please attach drawing)

\*Tempering is required for load bearing holes and cutouts. Please note that 5/16" laminated glass can only be tempered to a max of 47" x 80".

\*\*Heat strengthening is recommended for glass over 50 square feet.

**PROCESSING REQUIREMENTS**

Please choose **all** options that apply and provide detail as needed.

**Edges**

- Seamed Edges  Top  Bottom  Left Side  Right Side
- Flat Machine Polished Edges  Top  Bottom  Left Side  Right Side

**Cuts**

- Notches\*  Yes  No \_\_\_\_\_
- Internal Cutouts\*  Yes  No \_\_\_\_\_
- Pattern Cuts\*  Yes  No \_\_\_\_\_
- Holes\*  Yes  No \_\_\_\_\_

**ANSI**

- ANSI logo on glass\*\*  Yes  No
- ANSI logo type  American  Canadian \_\_\_\_\_
- ANSI logo placement  Standard  Custom\*\*\* \_\_\_\_\_

\*If yes, please attach drawing.

\*\*ANSI logo is required for elevator interiors.

\*\*\*If ANSI logo placement is custom, please provide details.

**DESIGN CHARACTERISTICS**

Please choose **one** option from each category.

**Configuration**

- View
- Reflect

**LumiLevel** (View only)

- LumiLevel #1 (VCV0611)
- LumiLevel #2 (VCV0612)
- LumiLevel #3 (VCV0613)
- LumiLevel #4 (VCV0614)
- LumiLevel #5 (VCV0615)
- LumiLevel #6 (VCV0616)

**Interlayer Color**

- White
- Custom Pantone, Sherwin Williams or Benjamin Moore color: \_\_\_\_\_

STANDARD ETCH PATTERNS & INTERLAYERS

Please choose **one** pattern option below. Patterns are shown in the Reflect configuration.

Canopy




Glide



Glint



Hive

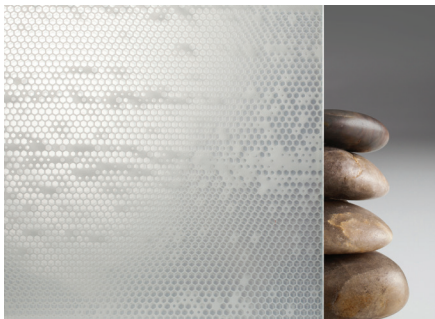

Palisade




Plot



Ripple



Surge

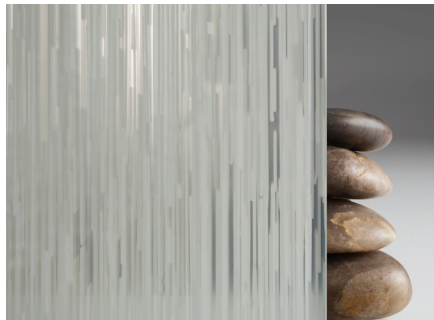

Custom (please provide details)

NOTES

Four horizontal lines for writing notes.

Please send completed forms to [sales@forms-surfaces.com](mailto:sales@forms-surfaces.com) or contact us at 800.451.0410 with any questions.

T 800.451.0410 | [www.forms-surfaces.com](http://www.forms-surfaces.com)

**FORMS+SURFACES®**

© 2023 Forms+Surfaces® | All dimensions are nominal. Specifications and pricing subject to change without notice. For the most current version of this document, please refer to our website at [www.forms-surfaces.com](http://www.forms-surfaces.com).