VIVISTONE™ WHITE ONYX GLASS

| | | | DESIGN GUIDE | | |
|---|--|--|---------------------------------|--|-----------------|
| PROJECT NAME: JOB LOCATION: | | DATE:SPECIFIER: | | | |
| | | | | | PLEASE USE ADOB |
| | APP | LICATIONS | | | |
| If you select a Forms+Surfaces System, ple | ease skip the Project Details, Lite Descriptions | and Glass Characteristics sections. | | | |
| Forms+Surfaces Systems | | Other Applications* | | | |
| LEVELr Wall Cladding System | Glass Doors | Loose Lite(s) | | | |
| LEVELr Column System | Stile & Rail Doors | Other: | | | |
| LEVELe Wall Cladding System | LightPlane Panels (View only) | *For Other Applications, please fill out all sections. | | | |
| LEVELe Column System | | | | | |
| LEVELe Elevator Interiors | | | | | |
| LEVELc-2000 Elevator Interiors | | | | | |
| | PROJE | ECT DETAILS | | | |
| Please choose one option from each categ | ory. | | | | |
| Installation Type | Glass Thickness | Environment | Lighting Conditions | | |
| Captured Top & Bottom Only | 5/16" (7.7 mm) | Interior, Standard Humidity | Natural | | |
| Fully Framed | 7/16" (11.1 mm) | ☐ Interior, High Humidity | ☐ Backlit | | |
| Mounted to a Solid Substrate | 9/16" (13.7 mm) | Exterior, Exposed Setting | Spotlight | | |
| Curtain Wall/IGU | | Exterior, Covered Setting | Other (please provide details): | | |
| Post Mounted with Holes | | | | | |
| Water Feature | | | | | |
| | LITE D | ESCRIPTION | | | |
| Description (include next number if an | | Quantity | Cine (width whairh) | | |
| Description (include part number, if available) | | Quantity | Size (width x height) | | |
| | | - | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Please choose one option from each categ | | ARACTERISTICS | | | |
| | ory. | Des £1. | | | |
| Safety Standards Annealed | | Profile Flat | | | |
| Tempered* | | Curved (please attach drawing) | | | |
| Heat Strengthened** | | our voa (picase attacii drawing) | | | |
| | oles and cutouts. Please note that 5/16" lamin | ated glass can only be tempered to a may o | f 47" x 80". | | |
| **Heat strengthening is recommended for | | g.a.c. can you compored to a man of | | | |

T 800.451.0410 | www.forms-surfaces.com

FORMS+SURFACES®


DESIGN GUIDE

| PROCESSING REQUIREMENTS | | | | | | |
|---|---------------|-----------|------------------|---|--|--|
| Please choose all options that apply and provide detail as needed. | | | | | | |
| Edges | | | | | | |
| Seamed Edges | Тор | Bottom | Left Side | Right Side | | |
| Flat Machine Polished Edges | Тор | Bottom | Left Side | Right Side | | |
| Cuts | | | | | | |
| Notches* | Yes | No | | | | |
| Internal Cutouts* | Yes | ☐ No | | | | |
| Pattern Cuts* | Yes | No | | | | |
| Holes* | Yes | ☐ No | | | | |
| ANSI | | | | | | |
| ANSI logo on glass** | Yes | No | | | | |
| ANSI logo type | American | Canadian | | | | |
| ANSI logo placement | Standard | Custom*** | | | | |
| *If yes, please attach drawing. **ANSI logo is required for elevator interiors. ***If ANSI logo placement is custom, please pro | vide details. | | | | | |
| DESIGN CHARACTERISTICS | | | | | | |
| Please choose one option from each category. | | | | | | |
| Configuration | | | Finish | | | |
| View | Tiew Standard | | | | | |
| Reflect | | | Pearlex+ | | | |
| | | | Standard / Pe | earlex+* | | |
| | | | *One side Standa | ard / one side Pearley+ (View configuration only) | | |

FORMS+SURFACES®

SLAB OPTIONS

Please choose one slab option below. To select slabs and configure your ViviStone design, visit the ViviStone Virtual Quarry at www.virtualquarry.com.

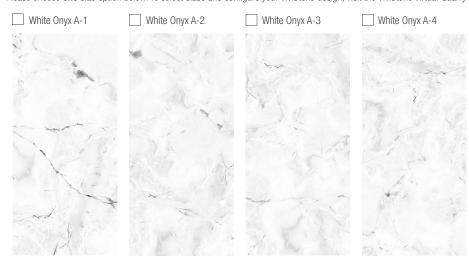

| NOTES |
|-------|
| |
| |
| |
| |
| |

Please send completed forms to sales@forms-surfaces.com or contact us at 800.451.0410 with any questions.

T 800.451.0410 | www.forms-surfaces.com

FORMS+SURFACES®