



WOOD VENEER

PRODUCT DATA





WOOD VENEER

PRODUCT DATA

Natural wood veneers are available for use in our LEVELe Wall Cladding and Column Systems and LEVELe and LEVELc-2000N Elevator Interiors. All veneers are finished with three coats of polyurethane for superior abrasion resistance while maintaining the richness and authenticity of genuine wood. Because wood veneer is a natural product, color and grain may vary. Veneer surfaces can be maintained using standard commercial cleaners and polishes formulated for use on interior woods.

Maximum available height for wood veneer panels is 108", with the exception of Bamboo, which has a maximum height of 96". Maximum available panel width for all veneer options is 36". Custom sizes are available at an additional charge and require a longer lead time. Please call to discuss the specific needs of your project.

FIRE RATING

Wood Veneer is NFPA and IBC class A fire rated and UBC class 1 fire rated.

STANDARD VENEERS



AMERICAN CHERRY



AMERICAN CHERRY W/ DARK MAHOGANY STAIN



AMERICAN WALNUT



BAMBOO



WHITE BIRCH

PREMIUM VENEERS




AUSTRALIAN LACEWOOD*



BIRDSEYE MAPLE



WALNUT BURL

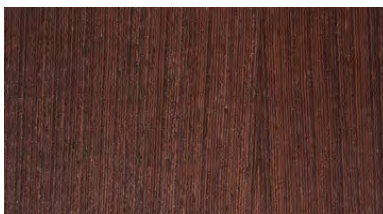

WENGE

*Due to the inherent characteristics of Australian Lacewood veneer, pronounced variations in color and grain pattern can occur. Significant variations on color and grain patterning between any issued control samples, compared to, as well as within, actual production runs should be anticipated.

T 1.800.451.0410 | F 412.781.7840 | www.forms-surfaces.com

FORMS+SURFACES®

© 2018 Forms+Surfaces® | All dimensions are nominal. Specifications and pricing subject to change without notice. For the most current version of this document, please refer to our website at www.forms-surfaces.com.