



# LIGHT COLUMN PATHWAY BOLLARD, SERIES 600


LIGHTING PLOTS

## LAMP DESCRIPTIONS

LAMP	DESCRIPTION	COLOR TEMPERATURE	LUMINAIRE LUMENS*	B.U.G. RATING
3000K LED	14W custom LED light engine	3000K	808	B0-U3-G1
4000K LED	14W custom LED light engine	4000K	808	B0-U3-G1


\*Luminaire lumens represents the absolute photometry for the luminaire, and indicates the lumens out of the entire fixture.

**POLAR CANDELA PLOT (14W LED, 3000K/4000K)**

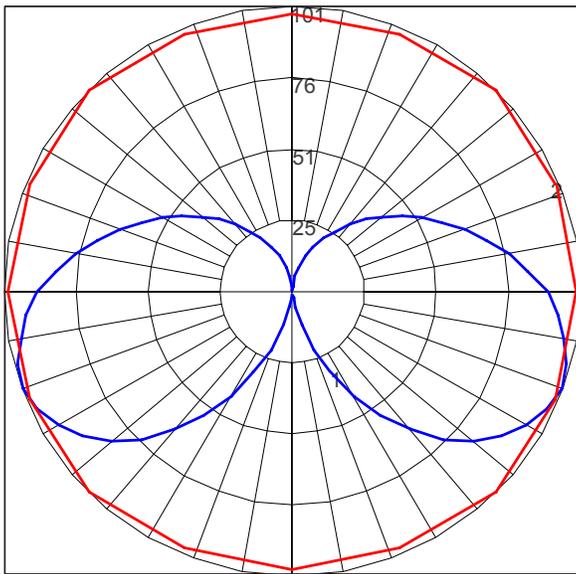

Maximum Candela = 101.12 Located at Horizontal Angle = 45, Vertical Angle = 70  
 #1 - Vertical Plane Through Horizontal Angles (45 - 225) (Through Max. Cd.)  
 #2 - Horizontal Cone Through Vertical Angle (70) (Through Max. Cd.)

**ISOFOOTCANDLE PLOT (14W LED, 3000K/4000K)**

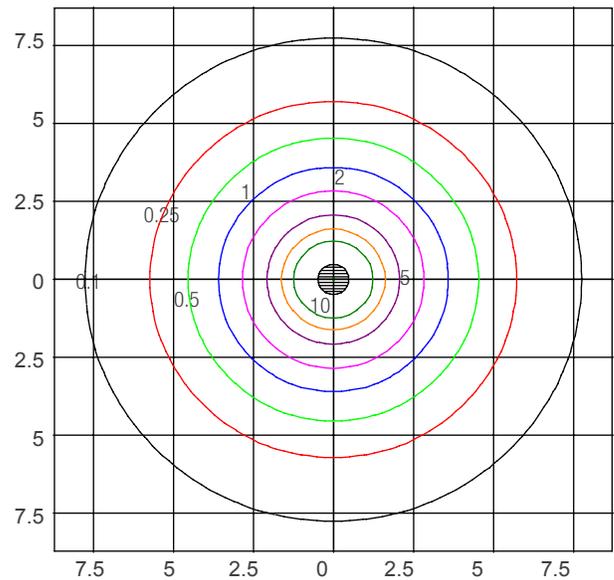

Isofootcandle Plot shows light distribution pattern at ground level with LED light board. Readings have been taken assuming the photometric center of the luminaire to be 0.51 feet above ground level. IES files for standard lamps are available on our website.