



RINCON BOLLARD


LIGHTING PLOTS

LAMP DESCRIPTIONS

LAMP	DESCRIPTION	COLOR TEMPERATURE	LUMINAIRE LUMENS*	B.U.G. RATING
3000K LED	14W custom LED light engine	3000K	1020	B0-U3-G1
4000K LED	14W custom LED light engine	4000K	1020	B0-U3-G1


*Luminaire lumens represents the absolute photometry for the luminaire, and indicates the lumens out of the entire fixture.

POLAR CANDELA PLOT (14W LED, 3000K/4000K)

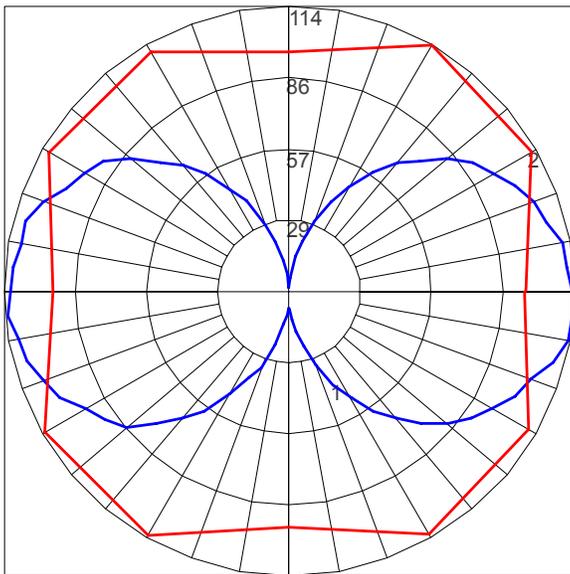

Maximum Candela = 114.24; Located at Horizontal Angle = 60; Vertical Angle = 85
 #1 - Vertical Plane Through Horizontal Angles (60 - 240) (Through Max. Cd.)
 #2 - Horizontal Cone Through Vertical Angle (85) (Through Max Cd.)

ISOFOOTCANDLE PLOT (14W LED, 3000K/4000K)

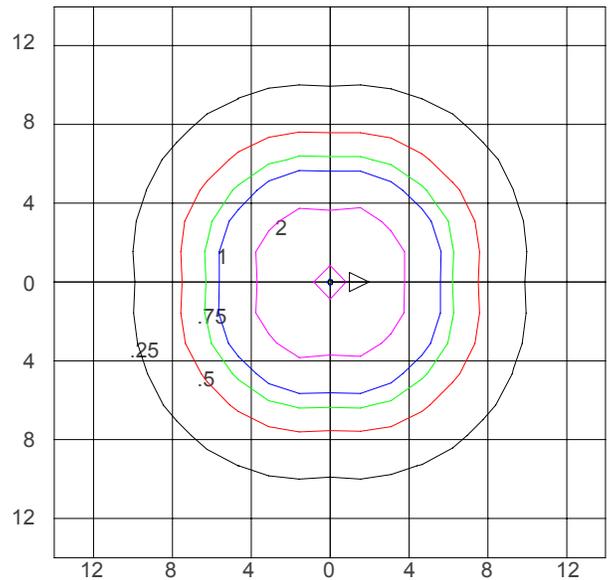

Isofootcandle Plot shows light distribution pattern at ground level with custom LED light engine with no shield. Readings have been taken assuming the photometric center of the luminaire to be 3 feet above ground level. IES files for standard lamps are available on our website.