



**RINCON™ PEDESTRIAN**


LIGHTING PLOTS

**LAMP DESCRIPTIONS**

LAMP	DESCRIPTION	COLOR TEMPERATURE	LUMINAIRE LUMENS*	B.U.G. RATING
3000K LED	30W custom LED light engine	3000K	2175	B1-U4-G2
4000K LED	30W custom LED light engine	4000K	2175	B1-U4-G2


\*Luminaire lumens represents the absolute photometry for the luminaire, and indicates the lumens out of the entire fixture.

**POLAR CANDELA PLOT (30W LED, 3000K/4000K)**

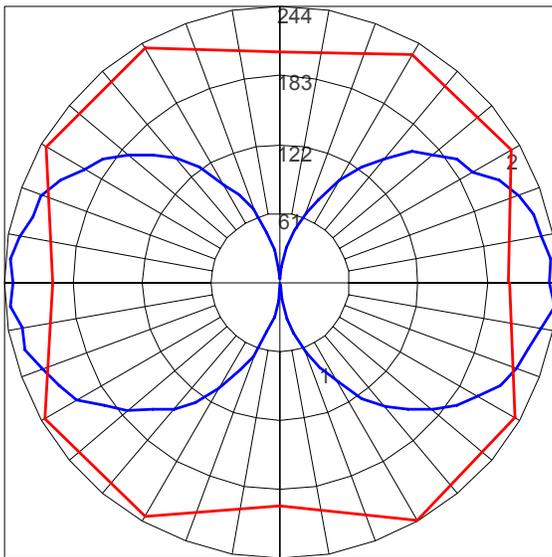

Maximum Candela = 243.98; Located at Horizontal Angle = 300; Vertical Angle = 85  
 #1 - Vertical Plane Through Horizontal Angles (300 - 120) (Through Max. Cd.)  
 #2 - Horizontal Cone Through Vertical Angle (85) (Through Max Cd.)

**ISOFOOTCANDLE PLOT (30W LED, 3000K/4000K)**

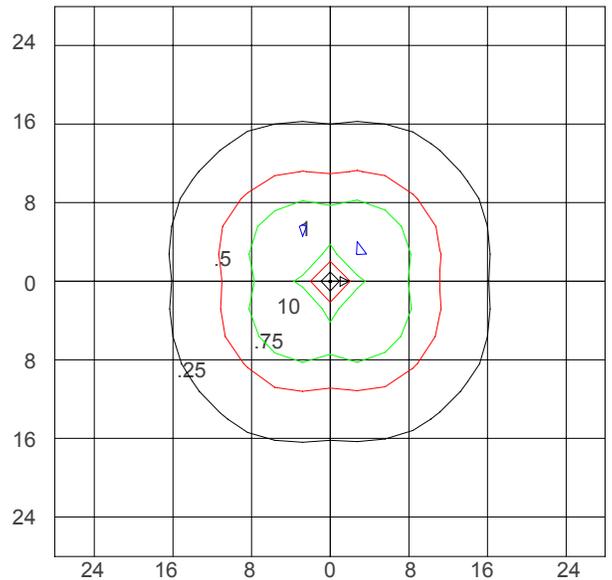

Isofootcandle Plot shows light distribution pattern at ground level with custom LED light engine with no shield. Readings have been taken assuming the photometric center of the luminaire to be 8.20 feet above ground level. IES files for standard lamps are available on our website.