OLYMPIA™ BIKE RACK

SURFACE MOUNT INSTALLATION INSTRUCTIONS

MATERIALS INCLUDED

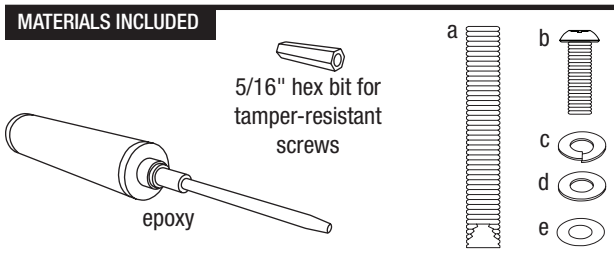

TOOLS NEEDED

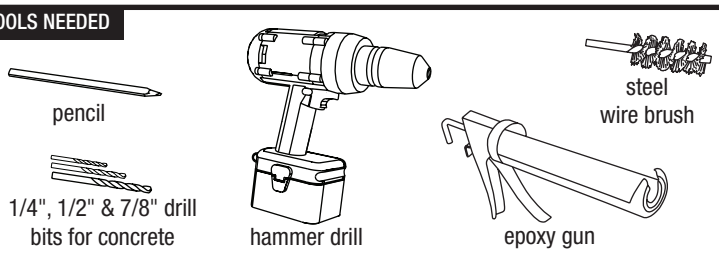

STEP BY STEP FOR ALL OLYMPIA BIKE RACKS

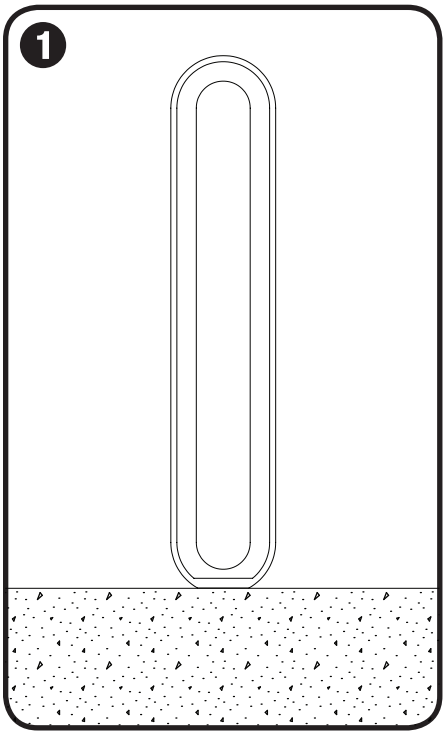

Mark hole locations

- Place bike rack in desired location. Mark center of each hole location with a pencil.

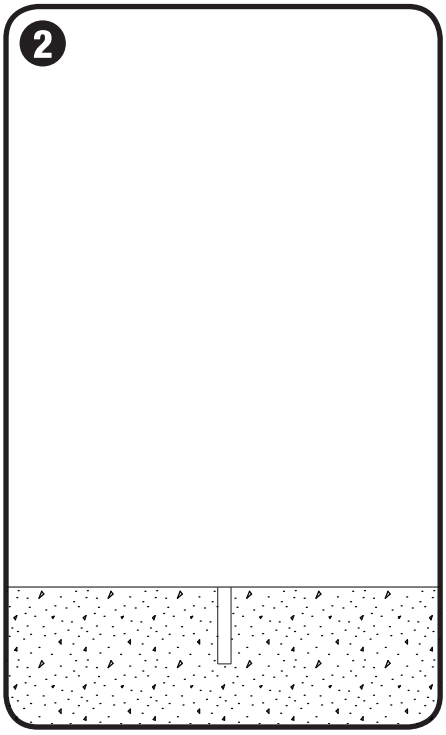

Drill holes

- Use hammer drill to drill 5" deep x 7/8" diameter anchor hole at each marked location using a 7/8" drill bit suitable for concrete drilling.

  NOTE: Forms+Surfaces recommends starting holes with 1/4" diameter drill bit followed by 1/2" and finally 7/8" for maximum accuracy.

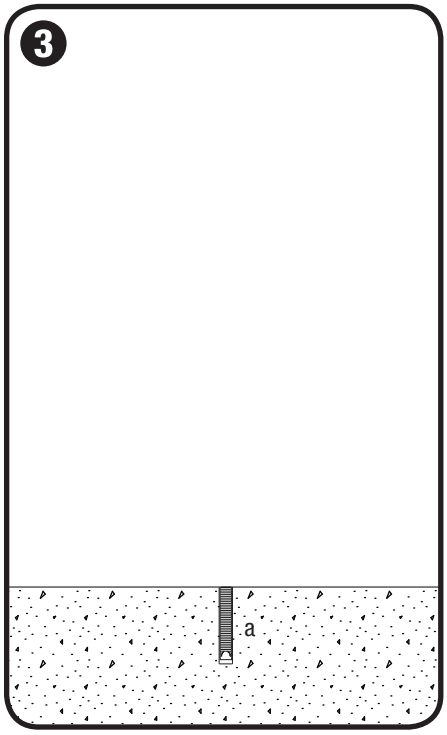

Fill holes & insert anchors

- Use compressed air and steel wire brush to clean each anchor hole in accordance with epoxy instructions.
- Use epoxy in epoxy gun to fill each anchor hole 5/8 of the hole depth in accordance with epoxy instructions.
- Insert 1/2"-13 x 5" epoxy anchor (a) into each anchor hole so anchor top is flush with ground. Allow proper curing time according to cure schedule on epoxy instructions before moving on to step 4.

T 800.451.0410 | www.forms-surfaces.com

FORMS+SURFACES®

© 2012 Forms+Surfaces® | All dimensions are nominal. Specifications and pricing subject to change without notice. For the most current version of this document, please refer to our website at www.forms-surfaces.com.

OLYMPIA™ BIKE RACK

SURFACE MOUNT INSTALLATION INSTRUCTIONS

STEP BY STEP FOR ALL OLYMPIA BIKE RACKS

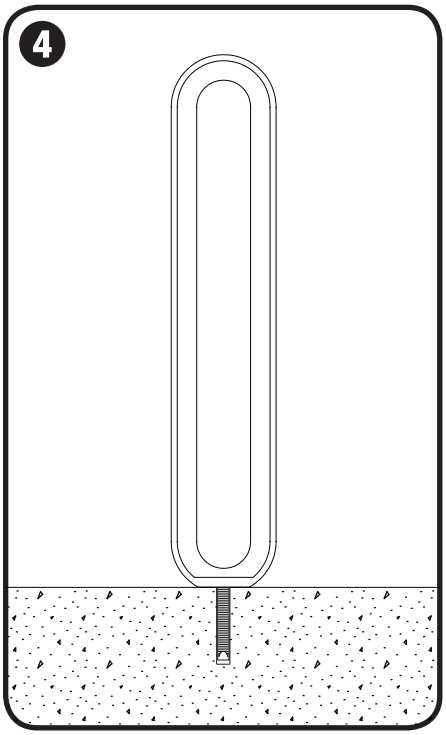

Position bike rack

- Position bike rack so that mounting holes line up with anchors.

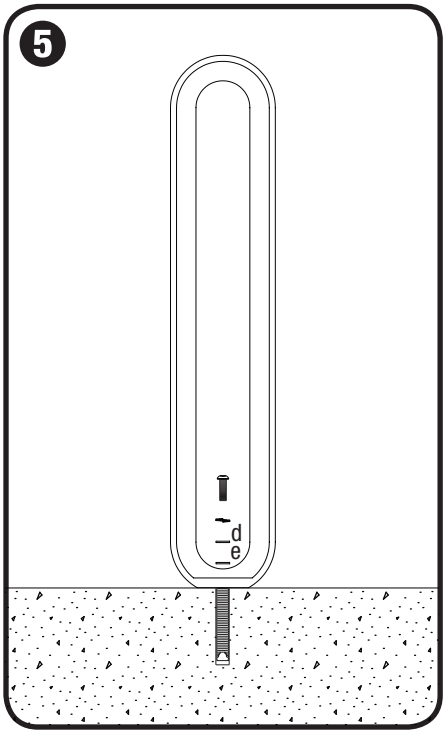

Attach bike rack

- Slide 1/2" stainless steel lock washer (c), then 1/2" stainless steel flat washer (d) and 1/2" nylon flat washer (e) onto each 1/2"-13 x 1-1/2" tamper-resistant button head cap screw (b).
- Insert screws into mounting holes in bike rack and thread into anchors using provided 5/16" hex bit for tamper-resistant screws.

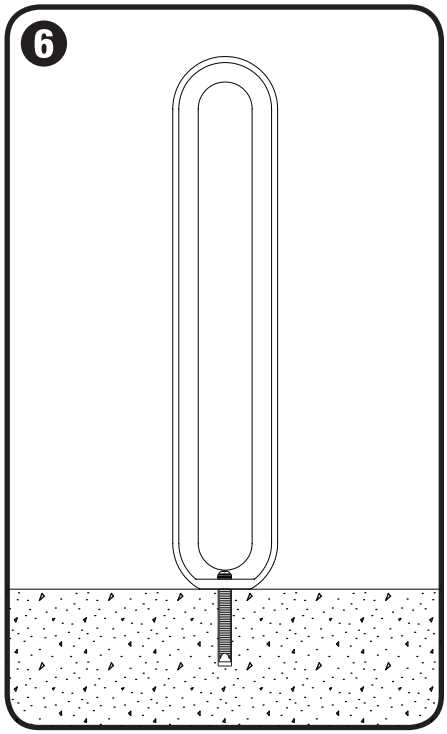

Tighten screws

- Tighten screws until snug.

© 2012 Forms+Surfaces® | All dimensions are nominal. Specifications and pricing subject to change without notice. For the most current version of this document, please refer to our website at www.forms-surfaces.com.