




APEX™ LITTER & RECYCLING RECEPTACLE

SURFACE MOUNT INSTALLATION INSTRUCTIONS


MOUNTING KIT (SOLD SEPARATELY)



TOOLS NEEDED

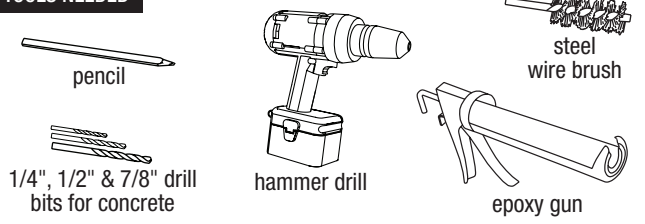


STEP BY STEP FOR ALL SURFACE-MOUNTED APEX LITTER & RECYCLING RECEPTACLES

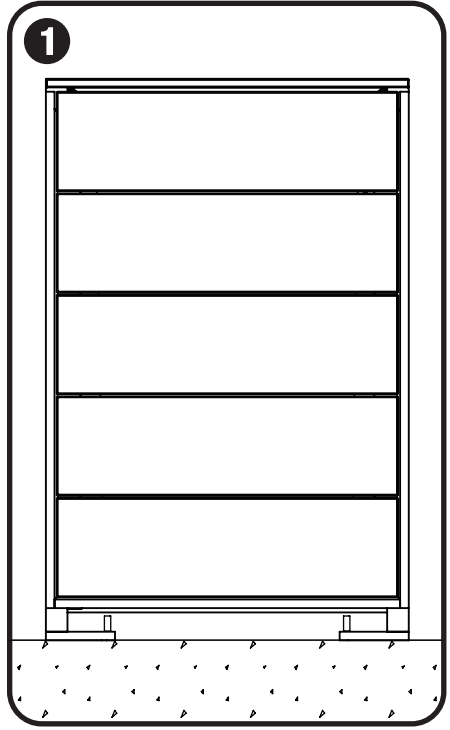

Mark hole locations

- Place receptacle in desired location. Mark center of center of each hole location in base with a pencil.


NOTE: Receptacle is not freestanding and must be supported during this step.

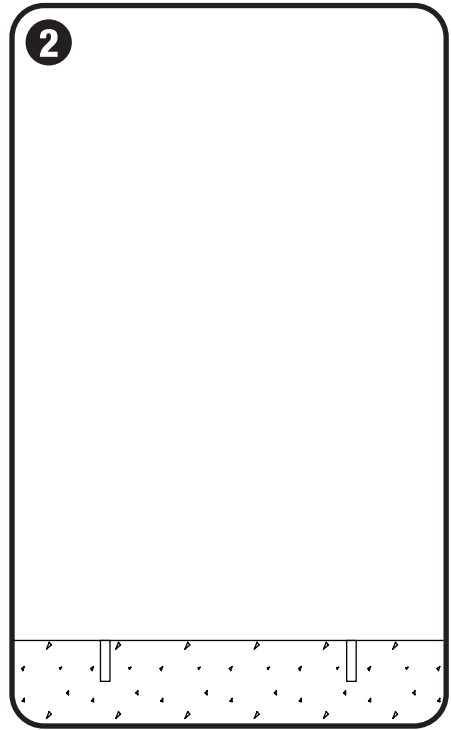

Drill holes

- Use hammer drill to drill 5" deep x 7/8" diameter anchor holes at each marked location using a 7/8" drill bit suitable for concrete drilling.

NOTE: Forms+Surfaces recommends starting holes with 1/4" diameter drill bit followed by 1/2" and finally 7/8" for maximum accuracy.

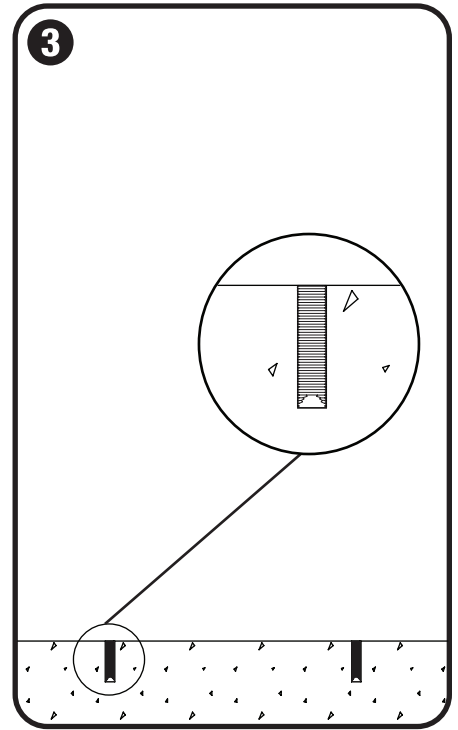


Insert & set anchors

- Use compressed air and steel wire brush to clean anchor holes in accordance with epoxy instructions.
- Use epoxy in epoxy gun to fill each anchor hole 5/8 of the hole depth in accordance with epoxy instructions.
- Insert 1/2"-13 x 5 epoxy anchor (a) into each anchor hole so anchor top is flush with ground. Allow proper curing time, according to cure schedule, on epoxy instructions before moving on to step 4.

APEX™ LITTER & RECYCLING RECEPTACLE


SURFACE MOUNT INSTALLATION INSTRUCTIONS

STEP BY STEP FOR ALL SURFACE-MOUNTED APEX LITTER & RECYCLING RECEPTACLES

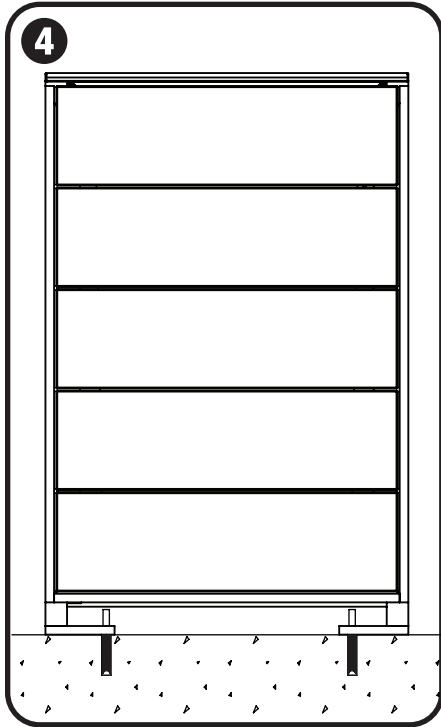


Position receptacle

- Position receptacle so that each mounting hole lines up with anchor.
- NOTE: Receptacle is not freestanding and must be supported until steps 5 and 6 are complete.

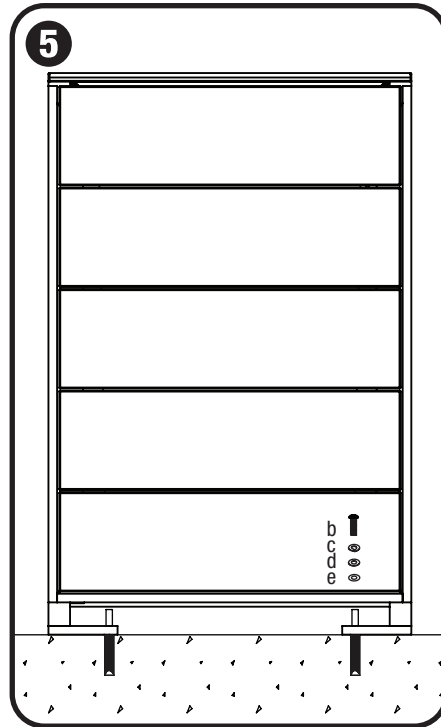

Attach receptacle

- Slide 1/2" stainless steel lock washer (c), then 1/2" stainless steel flat washer (d) and 1/2" nylon flat washer (e) onto each 1/2"-13 x 1-1/2" tamper-resistant button head cap bolts (b).
- Insert bolts into mounting holes in base and thread into anchors using the 5/16" hex bit for tamper-resistant bolts.

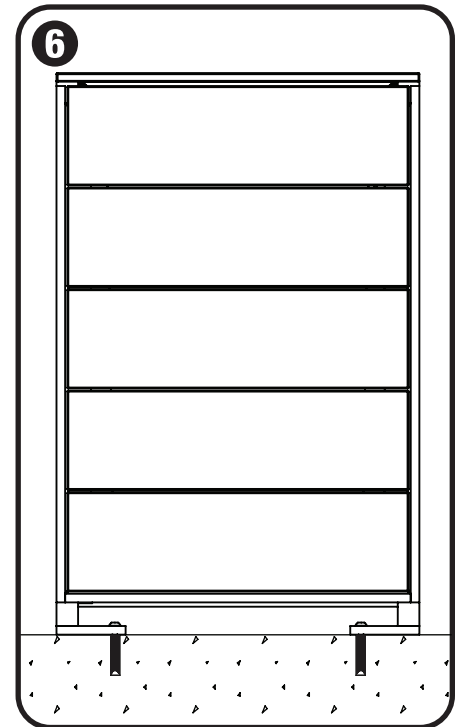

Tighten bolts

- Tighten bolts until snug.
- Place liner(s) inside receptacle, then close door.