
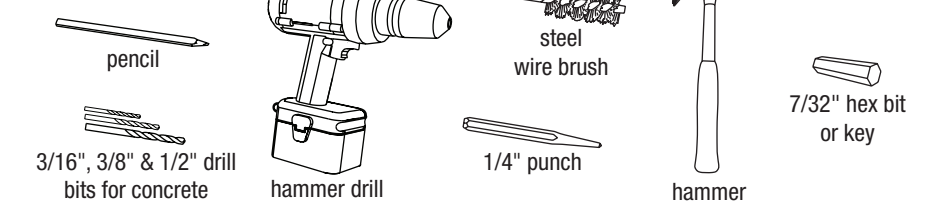
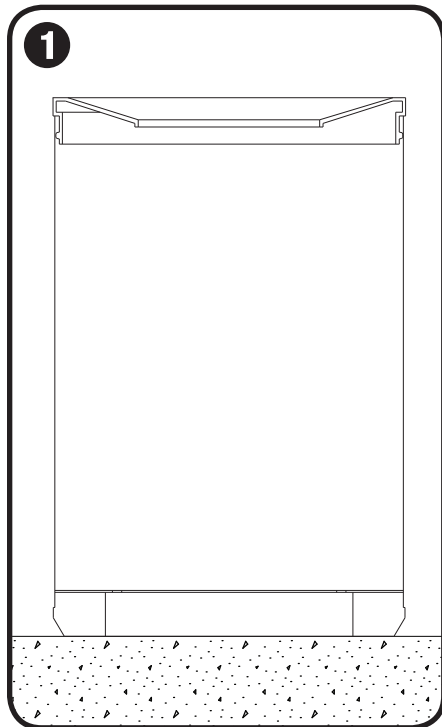


UNIVERSAL RECEPTACLE

SURFACE MOUNT INSTALLATION INSTRUCTIONS

MATERIALS INCLUDED	TOOLS NEEDED
	

STEP BY STEP FOR ALL SURFACE MOUNTED UNIVERSAL RECEPTACLES (SECTION VIEW SHOWN)




1 Mark hole location

- Place receptacle in desired location. Mark center of mounting hole locations in base with a pencil.



2 Drill hole

- Use hammer drill to drill 1-7/8" deep x 1/2" diameter anchor hole at marked locations using a 1/2" drill bit suitable for concrete drilling.
- NOTE: Forms+Surfaces recommends starting holes with 3/16" diameter drill bit followed by 3/8" and finally 1/2" for maximum accuracy.

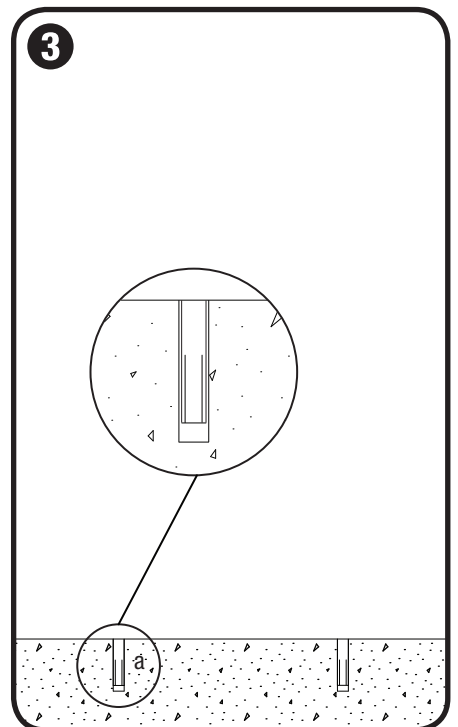


3 Insert & set anchors

- Use compressed air and steel wire brush to clean each anchor hole.
- Insert 3/8"-16 x 1-1/2" anchor (a) into each anchor hole and use hammer to tap anchor tops flush with ground level.
- Use 1/4" punch and hammer to set anchors by driving down the center of each anchor until it stops.

UNIVERSAL RECEPTACLE


SURFACE MOUNT INSTALLATION INSTRUCTIONS

STEP BY STEP FOR ALL SURFACE MOUNTED UNIVERSAL RECEPTACLES (SECTION VIEW SHOWN)

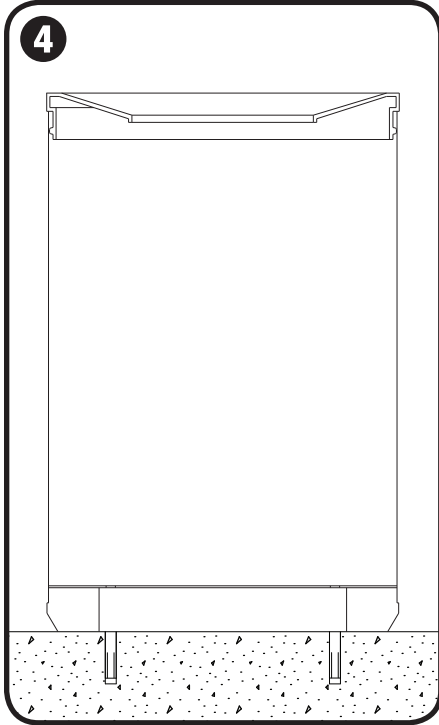


Position receptacle

- Position receptacle so that mounting holes lines up with anchors.

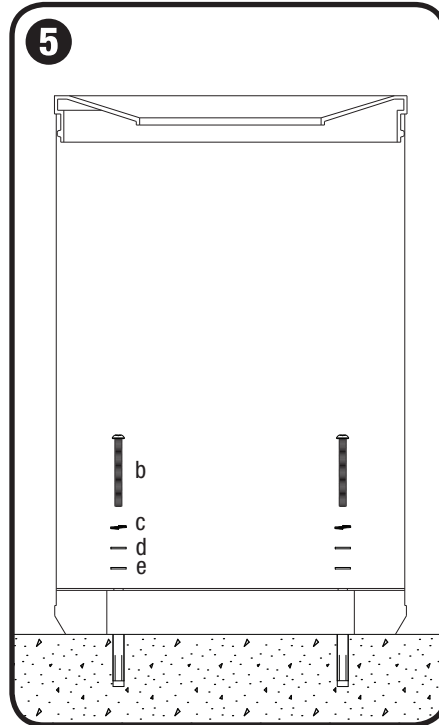

Attach receptacle

- Slide 3/8" stainless steel lock washer (c), then 3/8" stainless steel flat washer (d) and 3/8" nylon flat washer (e) onto each 3/8"-16 x 3" button head cap screw (b).
- Insert screws into mounting holes in base and thread into anchors using 7/32" hex bit or key.

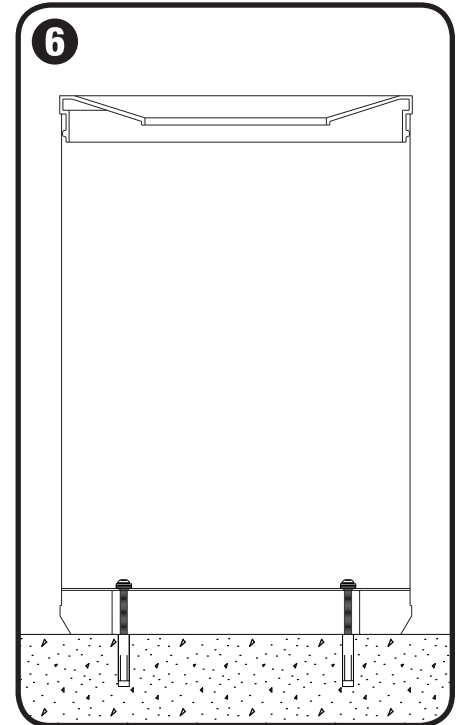

Tighten screw

- Tighten screws until snug.
- Place liner(s) inside receptacle, then insert lid.