


URBAN RENAISSANCE™ RECEPTACLE

SURFACE MOUNT INSTALLATION INSTRUCTIONS

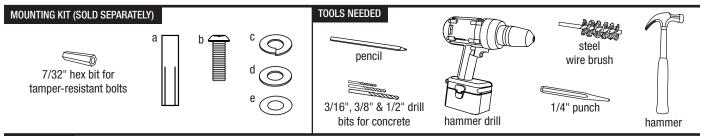

STEP BY STEP FOR ALL SURFACE MOUNTED URBAN RENAISSANCE RECEPTACLES

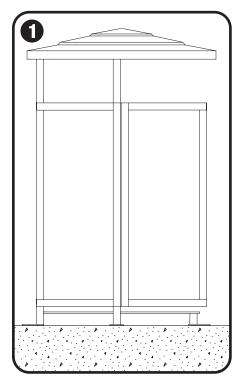

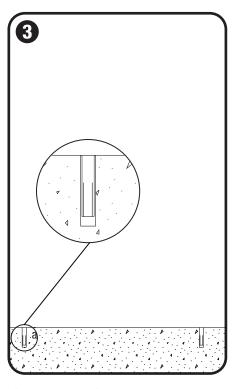

Mark hole locations

Place receptacle in desired location.
Mark center of each hole location in base with a pencil.

Drill holes

 Use hammer drill to drill 1-7/8" deep x 1/2" diameter anchor hole at each marked location using a 1/2" drill bit suitable for concrete drilling.

NOTE: Forms+Surfaces recommends starting holes with 3/16" diameter drill bit followed by 3/8" and finally 1/2" for maximum accuracy.

Insert & set anchors

- Use compressed air and steel wire brush to clean each anchor hole.
- Insert 3/8"-16 x 1-1/2" anchor (a) into each anchor hole and use hammer to tap anchor tops flush with ground level.
- Use 1/4" punch and hammer to set anchors by driving down the center of each anchor until it stops.


FORMS+SURFACES®


URBAN RENAISSANCE™ RECEPTACLE


5

SURFACE MOUNT INSTALLATION INSTRUCTIONS

STEP BY STEP FOR ALL SURFACE MOUNTED URBAN RENAISSANCE RECEPTACLES

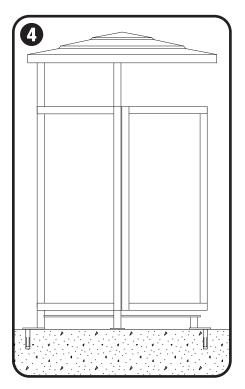



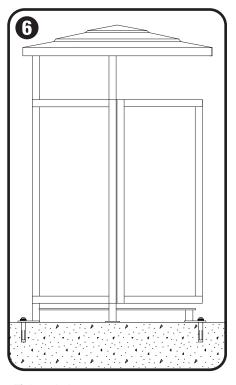

Position receptacle

 Position receptacle so that mounting holes line up with anchors.

Attach receptacle

- Slide 3/8"stainless steel lock washer (c), then 3/8" stainless steel flat washer (d) and 3/8" nylon flat washer (e) onto each 3/8"-16 x 1" tamper-resistant button head cap bolt (b).
- Insert bolts into mounting holes in receptacle and thread into anchors using 7/32" hex bit for tamper-resistant bolts.

Tighten bolts

d

- Tighten bolts until snug.
- Place liner(s) inside receptacle.